




DUST PROOF HIGH BAY LIGHT 60W



Technical Parameter

Name	LED Dust proof LED high bay lights
Part Number	NKU-20/12-060/2-FC
Input Power	60W
Luminous Flux	6000 lm
Luminous Efficiency	88 lm/w
Voltage	90VAC~277VAC
Current	150mA
Frequency	50Hz/60Hz
AC Power Factor	99%
DC Power Efficiency	94%
Beam Angle	73°(50%)
Color Temperature	2700~6500K
Color Rendering Index	Ra>80
Light Source Life	50000h
Working Temperature	-40℃ ~+ 50℃
Working Humidity	10% ~ 90%
Housing & Lampshade	aluminium alloy
IP Rating	Ip20
Color	silver gray
Size	∅ 358X360(mm)(Hook) ∅ 358X310(mm)(Sucker)
Package Dimension	395X395X335(mm)
Installation	Hook with a stick/ Sucker with a stick
G.W/ N.W	3.6kg/2.2kg

Light Distribution Curve


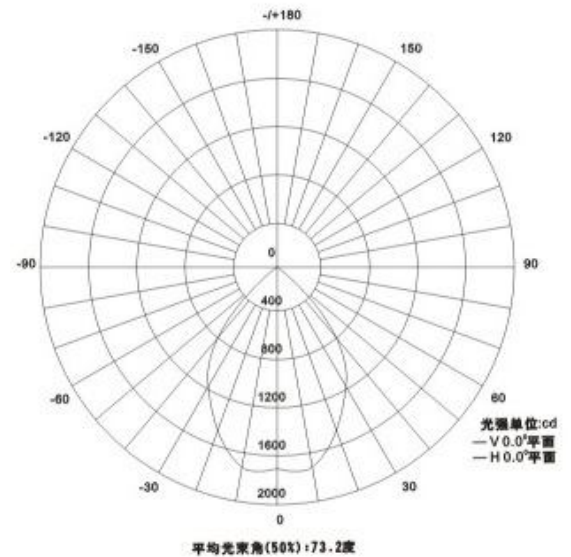


Application

Apply to factory ,warehouse ,basement,cold store,cement plant .etc which is full of oil stain or heavy dust.

Product features

- ⊙ High voltage, low current, energy-saving, environment friendly, healthy and saving money.
- ⊙ Sand blasting on aluminum alloy surface and anode treatment for oxidation resistance.
- ⊙ Dustproof, could used in heavy dust and metal dust environment .
- ⊙ It is available to hang it up with hook or hanging plate, as well as add pole between the lamp holder and hanging plate (or hook) per request.



Overall Dimension