




Factory/Warehouse Light 24W/30W



Technical Parameter

| Name | LED Factory/Warehouse Lights | LED Factory/Warehouse Lights |
|-----------------------|---|---|
| Part Number | NKE-96/12-024/2-FG (120VAC) NKF-96/12-024/1-FG (220VAC) | NKE-96/12-030/2-FG (120VAC) NKF-96/12-030/1-FG (220VAC) |
| Input Power | 24W | 30W |
| Luminous Flux | 2400 lm | 3000 lm |
| Luminous Efficiency | 88 lm/w | 88 lm/w |
| Voltage | 100/110/120/220/230/240VAC | 100/110/120/220/230/240VAC |
| Frequency | 50Hz/60Hz | 50Hz/60Hz |
| AC Power Factor | 55% | 55% |
| DC Power Efficiency | 94% | 94% |
| Beam Angle | 73°(50%) | 73°(50%) |
| Color Temperature | 2700~6500K | 2700~6500K |
| Color Rendering Index | Ra>80 | Ra>80 |
| Light Source Life | 50000h | 50000h |
| Working Temperature | -40℃ ~ +50℃ | -40℃ ~ +50℃ |
| Working Humidity | 10% ~ 90% | 10% ~ 90% |
| Housing & Lampshade | aluminium alloy | aluminium alloy |
| IP Rating | Ip20 | Ip20 |
| Color | silver gray | silver gray |
| Size | ∅ 218X214(mm) | ∅ 218X214(mm)(sucker) |
| Package Dimension | 550X550X530(mm)(8pcs) | 550X550X530(mm)(8pcs) |
| Installation | sucker | sucker |
| G.W/ N.W | 7kg(8pcs)/0.4kg | 7kg(8pcs)/0.4kg |

Light Distribution Curve

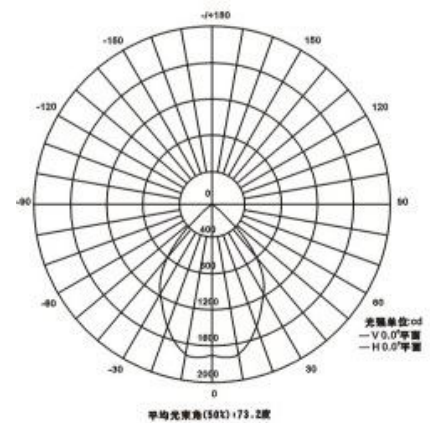


Application

Factory line, warehouse, cold store, highway toll stations, gas stations, supermarkets, exhibition halls, stadiums etc.

Product features

- ⊙ High voltage, low current, energy-saving, environment friendly, healthy and saving money.
- ⊙ Use aluminium alloy material, easy to transport, have uniform light and high effective reflection.

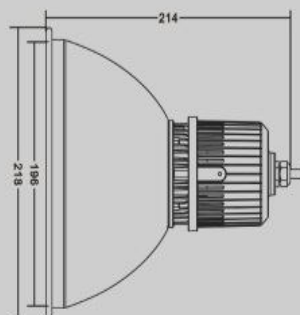

Overall Dimension